



Engineered for the dispensing of Bag-in-Box syrups, juice concentrate (smooth, without pulp or particles), teas, wines, and liquor.

Provides the following options from a distant location:

Four (4) valves with a capacity of 3.0 oz. (89 ml) each (Valve 1)

or


Two (2) valves with a capacity of 4.5 oz. (133 ml) each (Valve 2)

(Valve 1 dispenses syrup at a rate of 0.50 oz./sec.)

(Valve 2 dispenses syrup at a rate of 0.75 oz./sec.)

- Service life of 100,000 gallons (378,541 L)
- Highest flow rate available
- High CO2 inlet pressure capability for long runs - up to 90 psi (6.2 bar)
- Ultimate performance and reliability with extended service life
- Built-in auto shutoff, automatically shuts off pump when bag is empty and restarts when a full bag is connected
- Easy installation with all quick disconnect ports
- Recyclable materials
- High altitude shutoff also available
- Quiet operation.

<b>Dimensions</b>	<b>Width: 81.5mm, Depth: 116.3mm, Height: 133.8mm</b>
<b>Weight</b>	<b>0.56 kg</b>
<b>Temperature Limits</b>	<b>34° - 120° F (1.1° - 49° C)</b>
<b>Pump Design</b>	<b>Positive Displacement, Double Diaphragm</b>
<b>Power Source</b>	<b>CO2 Gas, Nitrogen or Compressed Dry Filtered Air</b>
<b>Displacement</b>	<b>3.2 oz. per cycle</b>
<b>Self-Priming</b>	<b>Up to 10 ft. (3.05 m)</b>
<b>Operating Pressure</b>	<b>20 psi (1.4 bar) min. / 90 psi (6.2 bar) max.</b>
<b>Liquid Inlet Pressure</b>	<b>30 PSI (2.1 bar) (2.1 bar) max.</b>
<b>Flow Rate</b>	<b>7.0 oz. (207.0 ml)/sec. - Open Flow</b>
<b>Approvals</b>	<b>CE, SK, NSF Standard 18</b>

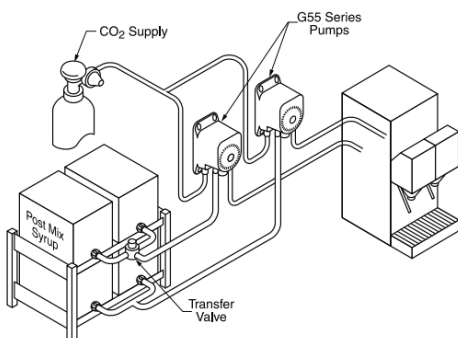

**Warranty**

For warranty specifics by product, contact your Lancer Sales Representative, Equipment design and/or specifications are subject to change without notice.