

AFFORDABLE ENERGY EFFICIENCY,

Lancer Worldwide chillers are engineered for performance and value, our chillers will yield longer beer runs while protecting your product and bottom line.




■ Features:

- ▶ Semi-submersible single phase pumps
- ▶ Rotationally moulded inner and outer polyethylene tank offering long life and corrosion resistance
- ▶ Tank insulated with environmentally responsible, water blown non-CFC polyurethane insulation
- ▶ Air tight design of tank and lid, keeping condensation to a minimum to eliminate dilution of glycol solution
- ▶ Tank moulded legs allow for easy cleaning under the unit once installed
- ▶ Easy installation and service
- ▶ Single phase power requirement (240V 50Hz) to operate
- ▶ IP56 Electrical connection
- ▶ Additional safety stops the pump in a low temperature alarm condition

■ Specifications:

DIMENSIONS	Width: 581mm, Depth: 581mm, Height: 1200mm
SPACE REQUIRED	Width: 581mm, Deep: 581mm
WEIGHT	Operational: 240kg Empty: 80kg Shipping: 83kg
BATH CAPACITY	Capacity: 160 Litres
THERMOSTAT	Electronic thermostat integral to the pump motor
POWER REQUIREMENTS	230V / 50Hz / 10Amp

■ PERFORMANCE CURVE

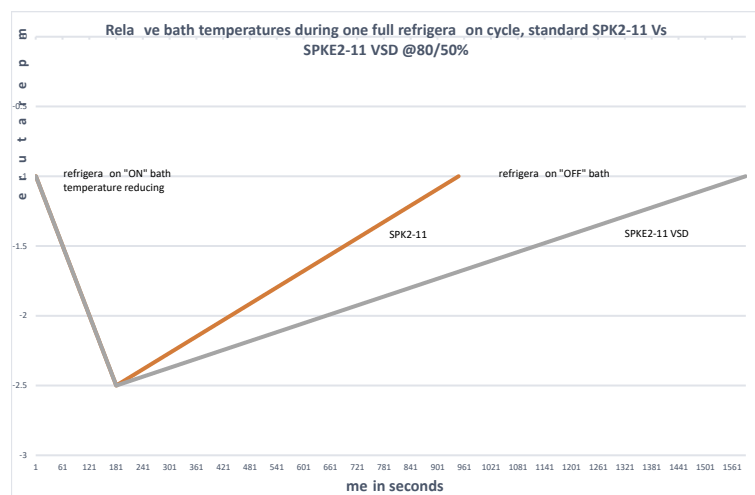

Part No.	Description
31000254	SIBRIAN 5KW R404 SPKE2-11/8
31000255	SIBRIAN 3KW R404 SPKE2-11/8
78000136	KIT C/O SPKE211 VSD SUIT SIB

■ ENERGY REDUCTION

Up to 58% energy reduction per year

Saving at \$0.27 per kWhr \$1848 Per year

Reduction in refrigeration cycles of 40%

*Data driven from an actual installation, results may vary depending on system design and configuration.

ROI: Approximate Savings Per Year: \$ 1,891.41

For more Information visit lancerbeverage.com or call +61 8 8268 1388



WARRANTY

For warranty specifics by product, contact your Lancer Sales Representative. Equipment design and/or specifications are subject to change without notice.