

Features





- Complete stainless-steel construction
- Has 2 x 6 metre x 8mm O.D. 304 grade Product coils with Push Fit Connectors.
- 12.5mm Barb Glycol Connections
- 25mm Insulation
- Compact and Lightweight - Stainless cover with mounting holes if required
- Unique heat exchange technology
- Scope to loop product coils for single product ambient inlet

Dimensions

Width: 485 mm, Depth: 201 mm,
Height: 111 mm

Configuration

Nominal Flow Rate	Max. Inlet Temperature	Working Pressure	Coil Material	Working Pressure	Nominal Temperature	Recommended Flow Rate
Beer Circuit: 3.5 LPM	Beer Circuit: 20.2 °C	Beer Circuit: Max. 400kPa	Glycol Circuit: 304 Stainless Steel	Glycol Circuit: Max. 400kPa	Glycol Circuit: -2 °C	Glycol Circuit: 6LPM

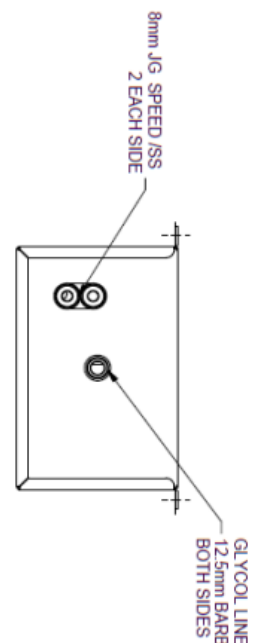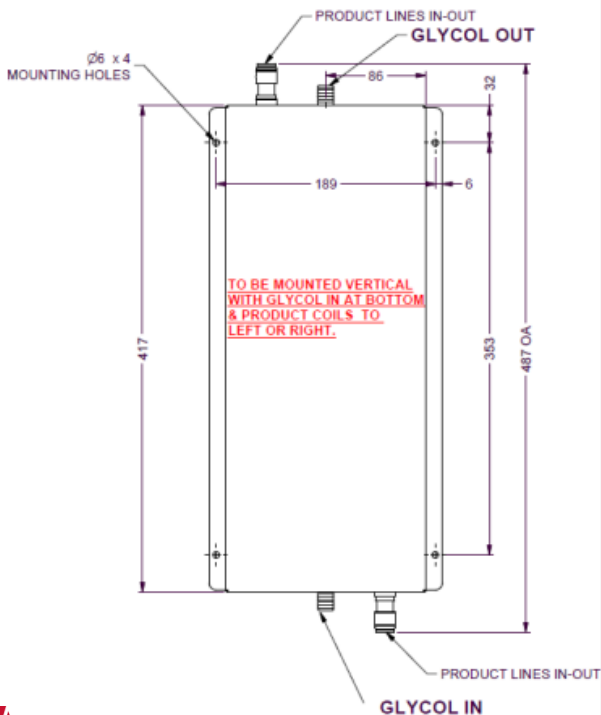

Warranty

For warranty specifics by product, contact your Lancer Sales Representative, Equipment design and/or specifications are subject to change without notice.