


The **Siberian Elite Chiller**, a glycol unit brings exceptional performance and can be placed outside the cool room, giving you more space for your products.

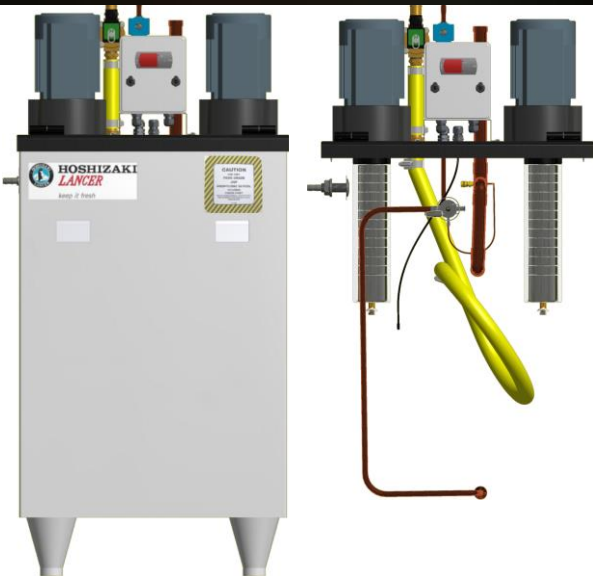

## Features

- Rotationally moulded inner and outer polyethylene tank offering long life and corrosion resistance
- Tank insulated with environmentally responsible, water blown non-CFC polyurethane insulation
- Airtight design of tank and lid, keeping condensation to a minimum to eliminate dilution of glycol solution
- Tank moulded legs allow for easy cleaning under the unit once installed.
- Easy installation and service
- Single phase power requirement (240V 50Hz) to operate both refrigeration and pump(s)
- IP56 Electrical connection
- Semi-submersible single-phase pumps- Single or dual pump options available

- 40L/min or 80L/min pump as standard. Other options available. POA.
- Manifolds complete with back check valves
- Glycol percentage check kit (refractometer)

## Refrigeration capacities @ - 10°C SST

|            |            |            |             |
|------------|------------|------------|-------------|
| <b>3Kw</b> | <b>5Kw</b> | <b>8Kw</b> | <b>10Kw</b> |
|------------|------------|------------|-------------|

## Configuration

|                           |   |
|---------------------------|---|
| <b>Dimensions</b>         | Width: 581 mm   Depth: 581 mm   Height: 1200 mm   |
| <b>Weight</b>             | Operational: 240kg   Empty: 80kg   Shipping: 83kg |
| <b>Space Required</b>     | Width: 581 mm   Depth: 581 mm                     |
| <b>Bath Capacity</b>      | 160 Litres  |
| <b>Thermostat</b>         | Electronic  |
| <b>Power Requirements</b> | 230V / 50Hz / 10Amp                               |



### Warranty