


Experience the reliability, convenience, and exceptional performance of Lancer Worldwide chillers, designed to maximize beer runs, protect your product, and reduce energy consumption by up to 58% per year with Variable Speed Drive technology, all while offering remarkable longevity, corrosion resistance, and easy maintenance.

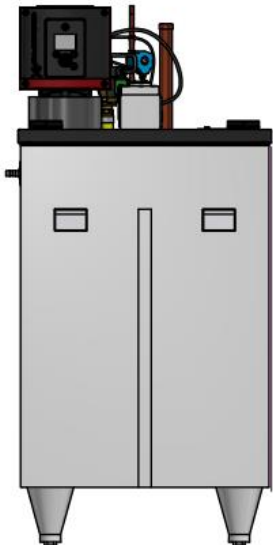

## Features

- The chillers feature semi-submersible single-phase pumps for efficient operation.
- The rotationally molded inner and outer polyethylene tank ensures durability and corrosion resistance.
- The tank is insulated with environmentally responsible, water-blown non-CFC polyurethane insulation.
- The airtight design of the tank and lid minimizes condensation, preventing dilution of the glycol solution.
- The tank's molded legs allow for easy cleaning and maintenance beneath the unit.
- The chillers are designed for easy installation and service.
- They require a single-phase power supply (240V, 50Hz) to operate.
- The electrical connection is rated IP56 for protection.
- An additional safety feature stops the pump in low-temperature alarm conditions.

## Refrigeration capacities @ - 10°C SST

**3Kw**

**5Kw**

## Configuration

<b>Dimensions</b>	Width: 581 mm   Depth: 581 mm   Height: 1200 mm
<b>Weight</b>	Operational: 240kg   Empty: 80kg   Shipping: 83kg
<b>Space Required</b>	Width: 581 mm   Depth: 581 mm
<b>Bath Capacity</b>	160 Litres
<b>Thermostat</b>	Electronic thermostat integral to the pump motor
<b>Power Requirements</b>	230V / 50Hz / 10Amp

## Warranty

For warranty specifics by product, contact your Lancer Sales Representative, Equipment design and/or specifications are subject to change without notice.