

## Features





- Complete stainless-steel construction
- Has 2 x 6 metre x 8mm O.D. 304 grade Product coils with Push Fit Connectors.
- 12.5mm Barb Glycol Connections
- 25mm Insulation
- Compact and Lightweight - Stainless cover with mounting holes if required
- Unique heat exchange technology
- Scope to loop product coils for single product ambient inlet

## Dimensions

**Width: 485 mm, Depth: 201 mm,  
Height: 111 mm**

## Configuration

Nominal Flow Rate	Max. Inlet Temperature	Working Pressure	Coil Material	Working Pressure	Nominal Temperature	Recommended Flow Rate
<b>Beer Circuit: 3.5 LPM</b>	<b>Beer Circuit: 20.2 °C</b>	<b>Beer Circuit: Max. 400kPa</b>	<b>Glycol Circuit: 304 Stainless Steel</b>	<b>Glycol Circuit: Max. 400kPa</b>	<b>Glycol Circuit: -2 °C</b>	<b>Glycol Circuit: 6LPM</b>

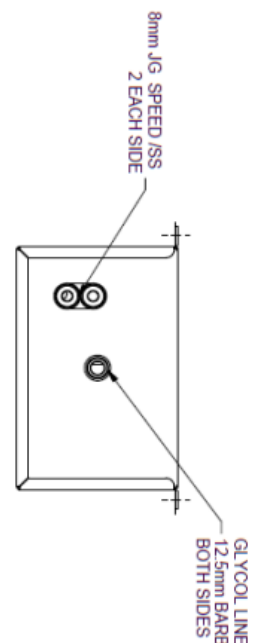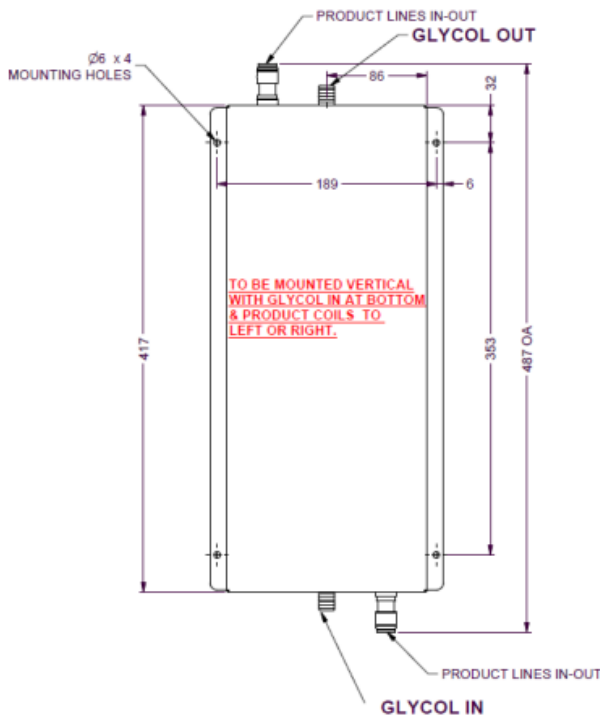

### Warranty

For warranty specifics by product, contact your Lancer Sales Representative, Equipment design and/or specifications are subject to change without notice.