



HOSHIZAKI

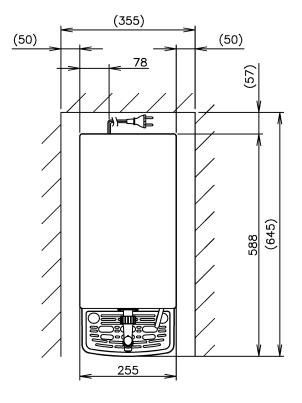



PLUG SHAPE (EU CONTINENTAL)

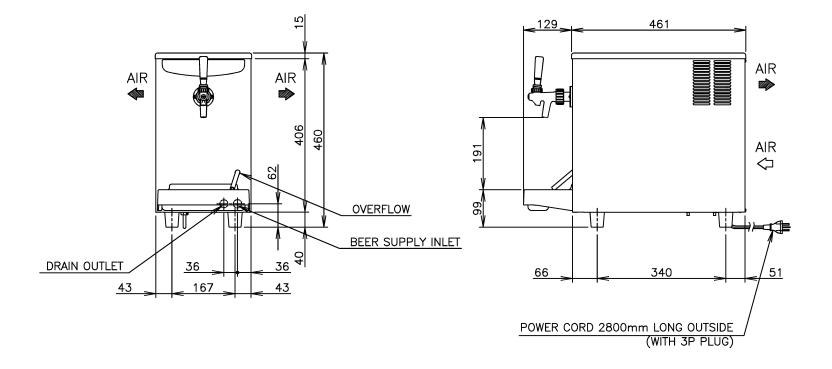



ITEM	Hoshizaki Draft Beer Dispenser				
MODEL	DBF-25SAC				
POWER SUPPLY	1 Phase 220V-240V 50Hz				
AMPERAGE	Running 1.3A Starting 8A				
ELECTRIC CONSUMPTION	Rated Motor 196W (Power Factor 69%)				
BEVERAGE CIRCUIT	1 Beer Circuit				
CAPACITY	0.37kVA				
DISPENSING CAPACITY	25L (30° C->8° C / 4h)				
ICE MAKING TIME	Approx. 5h (Initial Cooling Water Temp.30°C)				
ICE CAPACITY	Approx. 4L				
OUTSIDE DIMENSIONS	255mm(W)x587mm(D)x460mm(H)				
EXTERIOR	Stainless Steel, Galvanized Steel(Bottom) ABS Plastic (Side Panel)				
WATER TANK	ABS Plastic				
INSULATION	Polyurethane Foam				
COOLING SYSTEM	Instant Cooling (Ice)				
DISPENSING OUTLET	Dispensing Valve with Foaming Function				
COMPRESSOR	Hermetic				
CONDENSER	Wire Condenser Type, Air—cooled, Fan Motor x1				
HEAT REJECTION	390W				
EVAPORATOR	Copper Tube Coil				
REFRIGERANT CONTROL	Capillary Tube				
REFRIGERANT	R134a / 95g				
ICE MAKING CONTROL	Electrode				
ELECTRIC CIRCUIT PROTECTION	10A Fuse, Earthing Conductor				
COMPRESSOR PROTECTION	Auto-reset Overload Protector				
LEG	Rubber				
NET WEIGHT	24kg (Gross 27kg)				
PACKAGE	Carton 347mm(W)x647mm(D)x489mm(H)				
ACCESSORIES	Brush (Large x1, Small x1), Chain, Hook, Hook Mounting Screw x2, Nozzle Cap, O—ring, Cleaning Sponge x6, Spanner, Drain Pan, Grille				
OPERATING CONDITIONS	Ambient Temperature:5-35° C Voltage Range:198V - 242V				
*Wa recorne the right t	a make changes in enecifications and design without prior natice				

*We reserve the right to make changes in specifications and design without prior notice.

- 1. Install the product properly in accordance with the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements. (additional spacing is also required for proper air flow and pipe connections.)
- 2. The cooling capacity depends on beer and ambient temperatures.
- 3. The specifications are based on ambient temperature of 30±2° C.
- 4. The hatched area shows the wall.
- Allow at least the space indicated for ventilation.

 5. This drawing does not show the beer barrel and CO2 gas cylinder required for installation.

 Be sure to include them in layout drawing.
- 6. Product Code: B087-D003 (SAPPORO MODEL)

APPRO\ NAGASE		ED CHECKED NAGASE		DESIGNED WANGQY	 awn Angqy	scale 1/10		TRIGONOMETRY	
*	*			****	DATE	0.07.70	DRAWING NO). 7.4.0	SYMBOL
APPROVED	DESIG	NED	SYMBOL	DATE	2020	0.03.30	D28	342	