



FEATURES

- Advanced high efficiency heat exchanger technology uses 45% less refrigerant than previous coil models.
- Digital thermostat with 1-button energy saving ECO mode off-peak temperature setting.
- Rugged and dependable with low installation, operation and maintenance costs.
- Cabinet constructed from long life corrosion resistant stainless steel
- Inner tank is airtight. Condensation is therefore kept to a minimum. This prevents the dilution of the glycol solution.
- Adjustable stainless steel legs allow tank to be installed level, and also allows for easy cleaning.
- CE mark.

ADDITIONAL




- Rigid water blown non-CFC polyurethane insulation.
- 43°C rated condensing unit

SPECIFICATIONS

Refrigerant	R404a
Capacity (KW@-10aC SST)	2.7kW
	Data obtained from laboratory testing. Actual field performance may vary
Weight	Empty: 114kg, Operational: 315kg, Shipping: 129kg
Bath Capacity	200L 30% Propylene Glycol in water
Power Requirements	240V / 50Hz, 15A - refrigeration & pump

TECHNICAL DRAWING

ALLOW A MINIMUM
CLEARANCE OF 200MM
ON ALL SIDES FOR
SUFFICIENT AIR FLOW!

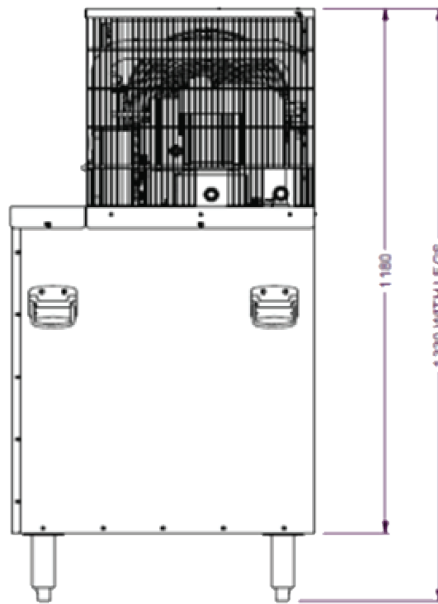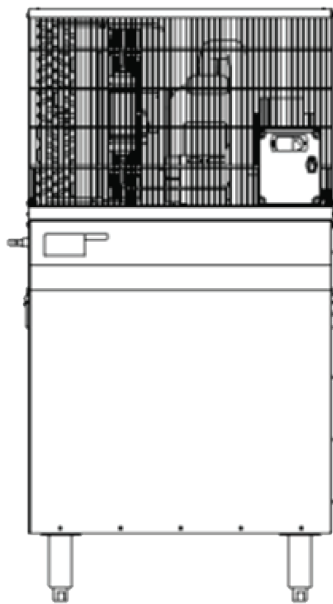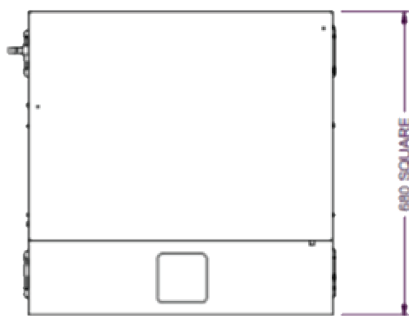

Glycoolpac



WARRANTY

For warranty specifics by product, contact your Lancer Sales Representative. Equipment design and/or specifications are subject to change without notice.